



SHX- DuFlow Double Action Purpose Pressure Vent

The SHX-DuFlow pressure venting device is a unique pressure vent for Chemical Gaseous type Fire Extinguishing systems.

When FM200 or Novec is discharged into a risk area, Negative and then positive Pressures are created, these can lead to structural damage should the enclosure be incorrectly vented

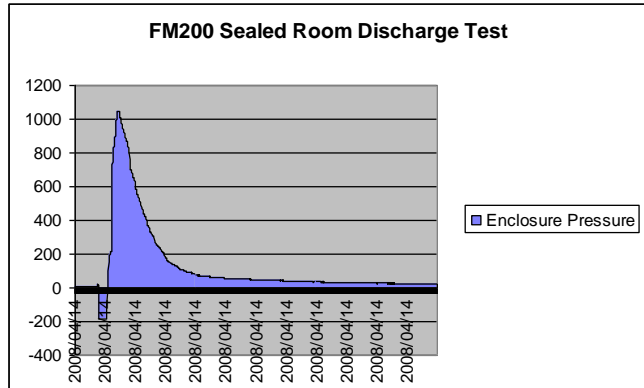

Uniquely the performance has been fully tested and verified by the Building Research Establishment with fully monitored gas discharge tests (April 2008, results available upon request).

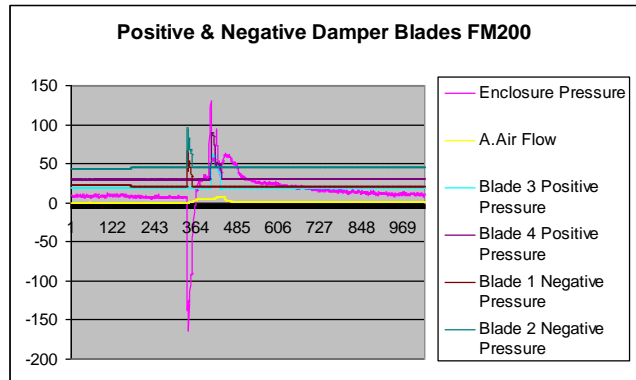

Features

- Patent Pending on Unique dual action blades
- Fits in to walls from 1mm to 400mm
- Simple to install
- Fully Tested in Live FM200 Discharge tests
- 4 hour fire rating
- Available within 24 hour
- Full backup and support
- High quality at affordable prices.

Buy the Quality of AFP



SHX-DuFlow Dimensions.

SHX-DuFlow Vent from AFP Air Technologies.
Another tested solution



The SHX-DuFlow is available in three sizes DUX300, DUX500, and special order a DUX700 which provide the following free vent areas for Negative Pressure and Positive Pressure:-

Product Code	Negative FVA M ²	Positive FVA M ²
DUX300	0.077	0.045
DUX500	0.212	0.125
DUX700	0.416	0.245

Vent Size	300	500	700
Width	430	630	830
Height	430	630	830
Depth	130	130	130
Hole Size	360x380	560x580	760x780
FVA	0.077/ 0.045m ²	0.212/0.125m ²	0.416/0.245m ²
Unit Weight	12kg	22kg	37kg

AFP the right choice

Fire Rated

4 hour fire resistance rating to EN1363-1 & EN13501-2

The New SHX-DuFlow Range from AFP Air Technologies LLP

