


■ DATA SHEET PROPORTIONER FD8000 GEN III FOR STATIONARY EXTINGUISHING SYSTEMS

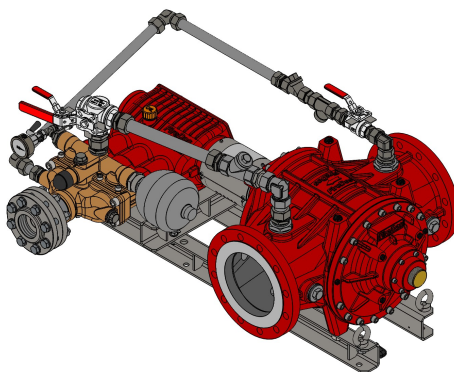

■ 1. TECHNICAL DATA

| Type | FD8000/1-S | FD8000/3-S |
|-------------------------------------|--|------------------------|
| Proportioning rate | 1 % | 3 % |
| Approvals | - | |
| Flow directions of water motor | Horizontal: "left → right" or "right → left" | |
| | Vertical: "top → bottom" or "bottom → top" | |
| Water flow rate ¹⁾ | 410 l/min – 8000 l/min | 420 l/min – 8000 l/min |
| Operating temperature ²⁾ | 5 °C – 50 °C (standard version) | |
| | 5 °C – 80 °C (High-Temp version) ^{x)} | |
| Storage temperature | -20 °C – 80 °C | |
| Operating pressure | 5 – 16 bar | |
| Weight ³⁾ | | |
| Freshwater version | 230 kg | 280 kg |
| Seawater version ^{x)} | 415 kg | 465 kg |
| ATEX classification ^{x)} | on request | |

1) The nominal proportioning rate is achieved when reaching the specified minimum figure. Indication for proportioning of fluid Newtonian foam agents at operating pressure of 5 bar. For more detailed information, refer to page 2, item 3. "Minimum water flow rate".

2) Operating temperature is the maximum ambient and medium (foam and extinguishing water) temperature. Maximum foam agent temperature is generally limited to 50 °C.


3) Weight indications are based upon the standard version in dry condition. Special versions will differ.

x) Optional equipment.




2. PRESSURE LOSS

Indication valid for operating pressure of 10 bar. For more information on different system conditions, please contact us.

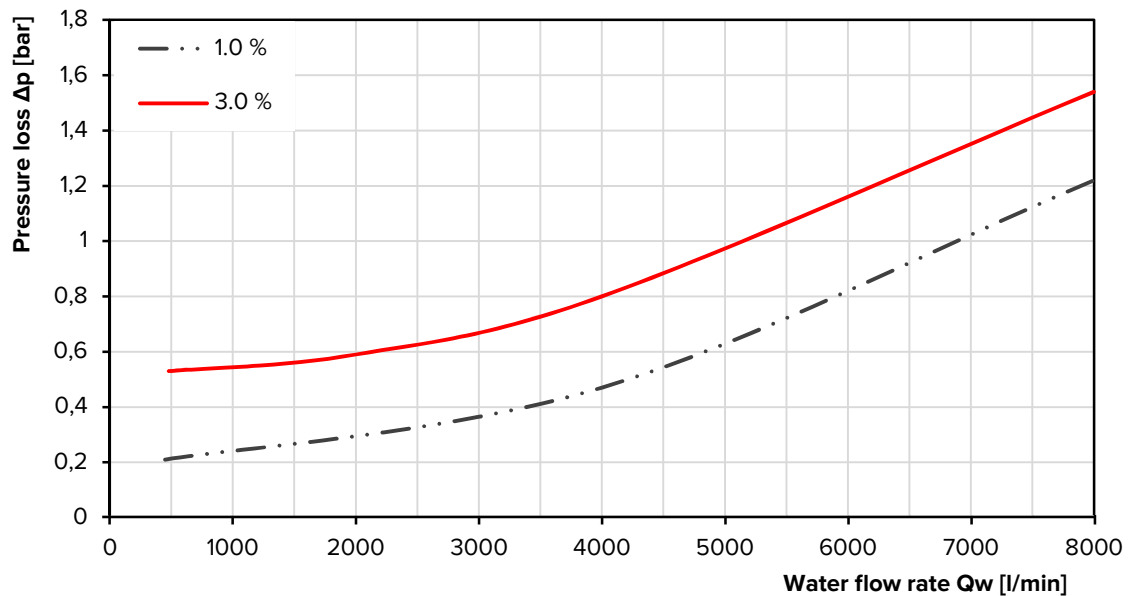

3. MINIMUM WATER FLOW RATE


The following diagrams show the effect of the operating pressure and foam agent viscosity on the minimum water flow rate.

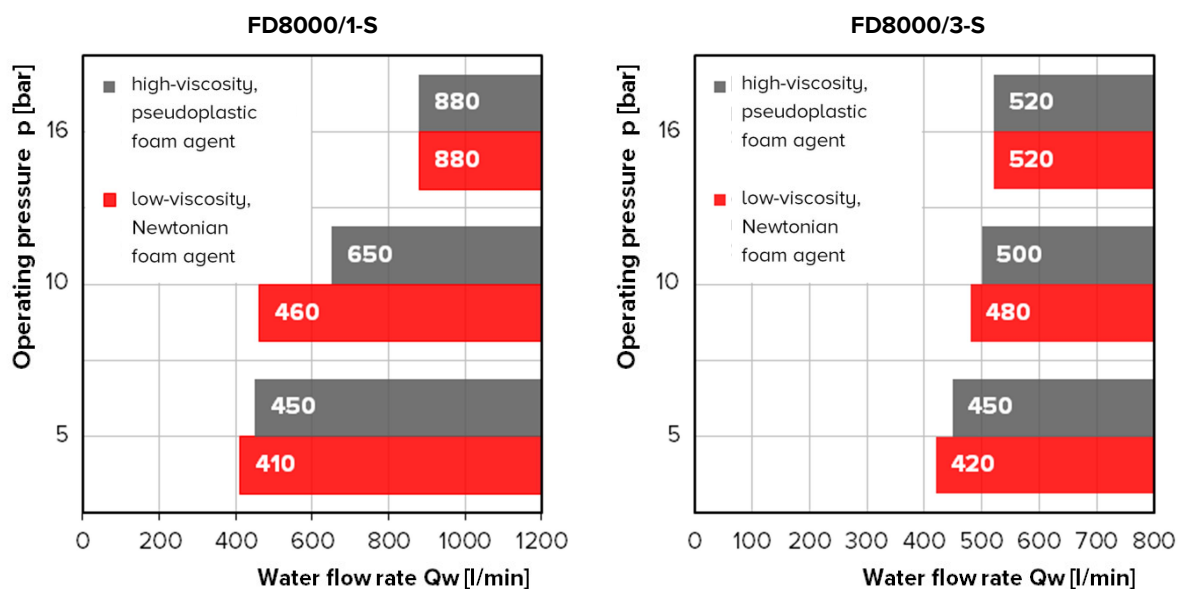

Comment: The values specified for the minimum extinguishing water flow rate increase by approx. 25% in the high-temperature version. The specified figures apply for the foam agent viscosity range stated in paragraph 4 only.

4. FOAM AGENT VISCOSITY

FireDos proportioners are suitable for all foam agents available on the market. For your reference, please find the corresponding (associated) range of dynamic viscosity below. Contact us if the dynamic viscosity of your foam agent is higher than the values in the diagram. **Do not hesitate to request our support for the correct dimensioning of your suction line.**

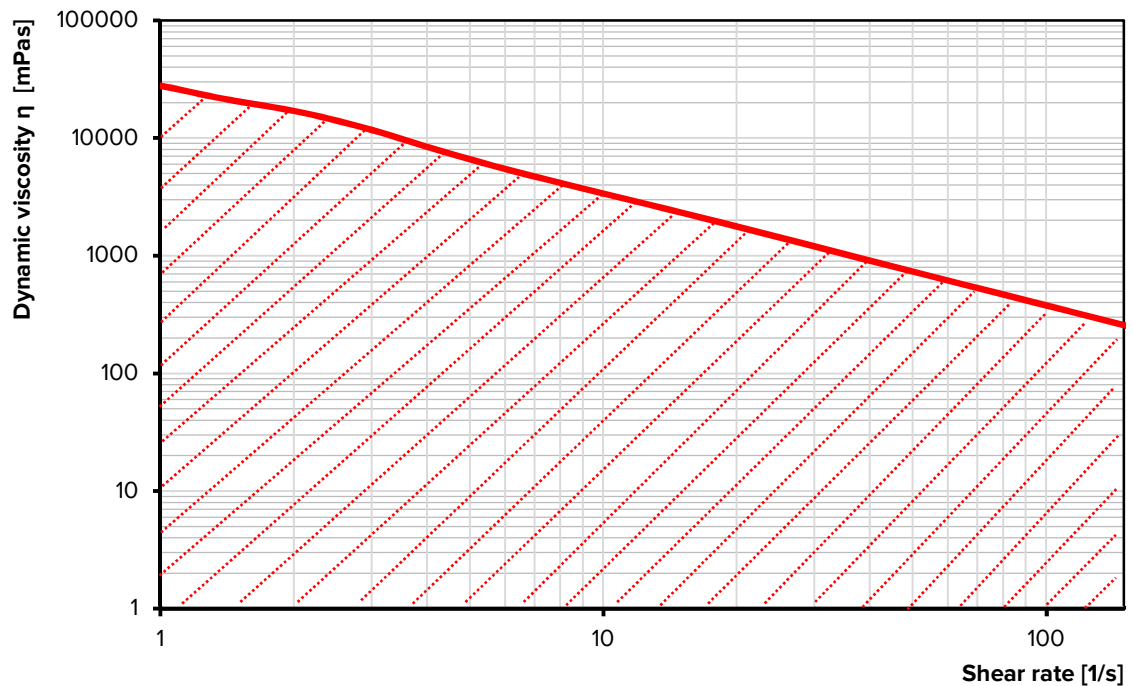


5. MATERIALS

| | Freshwater version | Seawater version |
|---|--|--|
| Water motor ⁴⁾ | Cast Aluminium G-AlSi7Mg HC-coated, AlMgSi1 HC-PTFE-coated, stainless steel 316 / 316Ti, POM, PVDF, NBR, FKM | Cast Bronze G-CuSn10, stainless steel 316 / 316Ti, Aluminium-Bronze CuAl10Fe5Ni5-C-GC, POM, PVDF, NBR, FKM |
| Proportioning pump ⁴⁾ | Stainless steel 316 / SS316Ti, POM, FKM, Aluminium oxide ceramic Al ₂ O ₃ , Aluminium-Bronze CuAl10Ni5Fe5-C-GC | |
| Pipework ⁴⁾ | Stainless steel 316 / CF8M / SS316Ti, PTFE, | |
| Support frame | Stainless steel 304 / 316 | |

⁴⁾ media-exposed materials


■ 6. FLOW DIAGRAM

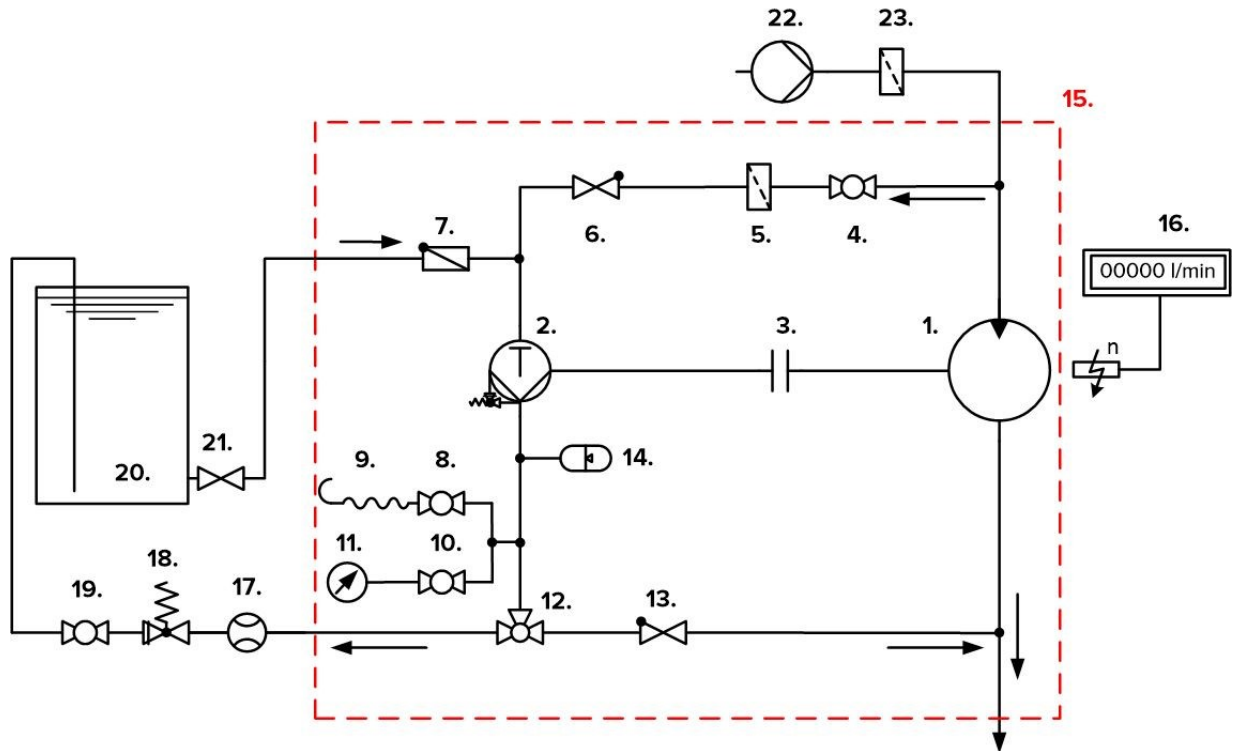

- | | |
|--|---|
| 1. Water motor | 13. Check valve in the proportioning line |
| 2. Proportioning pump | 14. Pulsation damper |
| 3. Coupling | 15. Standard scope of supply of FireDos proportioner |
| 4. 2-way ball valve "Flushing/Priming" | 16. Revolution counter with flow rate display ^{x)} |
| 5. Filter in the flushing line | 17. Flow meter for return line ^{x)} |
| 6. Check valve in the flushing line | 18. Pressure retention valve for return line ^{x)} |
| 7. Non-return flap in the suction line | 19. 2- way ball valve in return line ^{x)} |
| 8. Air bleed valve | 20. Foam agent supply |
| 9. Air bleed hose | 21. Shut-off valve in the suction line |
| 10. Shut-off valve pressure gauge | 22. Extinguishing water supply |
| 11. Pressure gauge | 23. Water filter |
| 12. 3-way ball valve "Returning/Proportioning" | |

X) Optional equipment

7. EXAMPLE FIGURE / DIMENSIONS

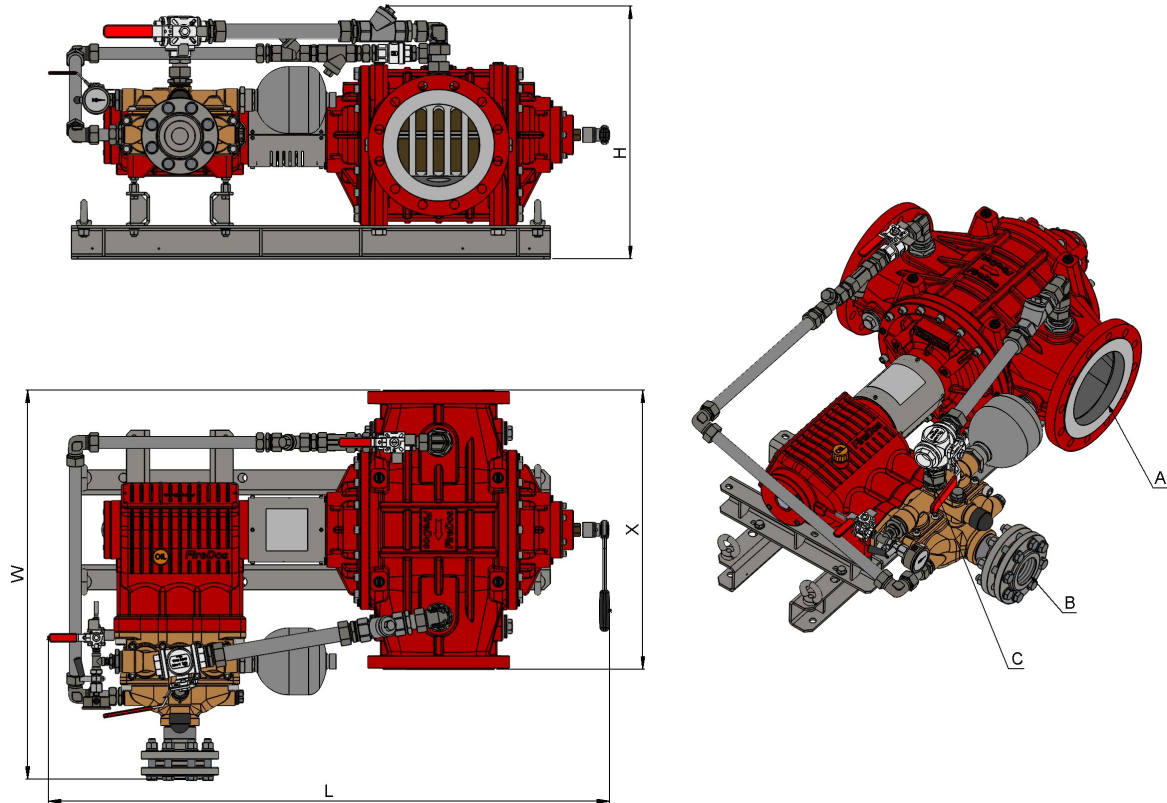

| Type | FD8000/1-S | FD8000/3-S |
|---|---|------------|
| Proportioning rate | 1 % | 3 % |
| Connection water motor A | Optionally: flange DIN EN 1092-1, DN200 PN16 flange ASME B16.5, 8" Class 150 | |
| Installation length water motor X ⁵⁾ | 670 mm | |
| Connection suction line B | 2.1/2" FT BSP | 3" FT BSP |
| Connection return line C | 1.1/4" FT BSP | 2" FT BSP |
| Length L ⁵⁾ | 1350 mm | 1400 mm |
| Width W ⁵⁾ | 950 mm | 1050 mm |
| Height H ⁵⁾ | 625 mm | 670 mm |

All figures are approximate only and depend on the particular version/equipment options.

⁵⁾ Further accessories to the proportioner may require more installation space

Please allow sufficient accessibility of the proportioner for maintenance work. For assistance to ensure sufficient accessibility, please refer to our planning manual for proportioners.

8. MANUFACTURER

FireDos GmbH, Auf der Kaulbahn 6, 61200 Woelfersheim, Germany
Phone +49 (0) 6036 9796-0, Email: info@firedos.de

We reserve the right to make modifications at any time.