

LI-ION TAMER[®] GEN 3

LITHIUM ION BATTERY OFF-GAS DETECTION SYSTEM



As the world's leading provider of advanced safety systems, Xtralis has introduced the *Li-ion Tamer GEN 3* off-gas detection system for the protection of lithium-ion batteries (LIB).

Li-ion Tamer GEN 3 reliably detects the early signs of failing LIBs (battery electrolyte vapours – off gas detection) allowing facility managers to respond to impending Thermal Runaway events much earlier than other protection systems. The system also provides multi-point temperature and humidity measurements for improved environmental control and situational awareness across a wide range of applications.

The *Li-ion Tamer GEN 3* system is highly scalable allowing cost effective deployment in modular, containerised, and large scale LIB installations. Simplified installation, featuring daisy-chain connections between sensing nodes, reduces cabling material and setup time.

System configuration and commissioning are quickly and easily done through a software interface, which provides diagnostic information for ease of troubleshooting and maintenance. Improved networking enables users to customize their detection solution by grouping sensing nodes into zones which is especially useful for complex and large installations. The system provides extended connectivity options for integration into the Battery Management System (BMS) via relays and Modbus TCP/IP.

The *Li-ion Tamer GEN 3* consists of the following major components:

(i) Sensing nodes, **(ii)** Hub, **(iii)** Power switch, **(iv)** Network switch, **(v)** Controller.

- Each sensing node comprises an off-gas sensor with advanced algorithms making it acutely sensitive to detecting battery electrolyte vapours (off-gassing compounds), does not require calibration, is compatible with all LIB form factors and chemistries, and has a lifetime comparable to a typical LIB system. The sensing node also includes temperature and humidity sensors for environmental monitoring.
- Sensing nodes are networked by the hubs and switches to the controller, which is the central point for managing and monitoring the entire system. The controller has relays and Modbus TCP/IP outputs that connect to the BMS or other control systems.



CUSTOMER BENEFITS

Earliest Warning

Utilizes an advanced algorithm to provide the earliest detection of lithium-ion battery off-gassing, creating a barrier for the prevention of catastrophic thermal runaway events.

Increased System Visibility

Allows quick and easy configuration and monitoring via user interface software that reduces commissioning and setup costs.

Lower Maintenance Cost

Provides calibration-free detection with an extended product lifetime to reduce overall cost of ownership and maintenance.

Enhanced Environmental Monitoring

Introduces granular environmental monitoring of the space with temperature and humidity detection at each detection node.


Improved Event Data Logging

Enhances storage capabilities of the controller to gather extensive event logging for more insight during post-event evaluation.

EASY SETUP AND MAINTENANCE

Setup and commissioning of the Li-ion Tamer GEN 3 system is done by connecting to the controller via the TCP/IP port.

The Software Interface simplifies system installation, commissioning, and maintenance activities. Enhanced system visibility and error tracking saves time and money by clearly and automatically identifying sensor alarm and fault conditions.

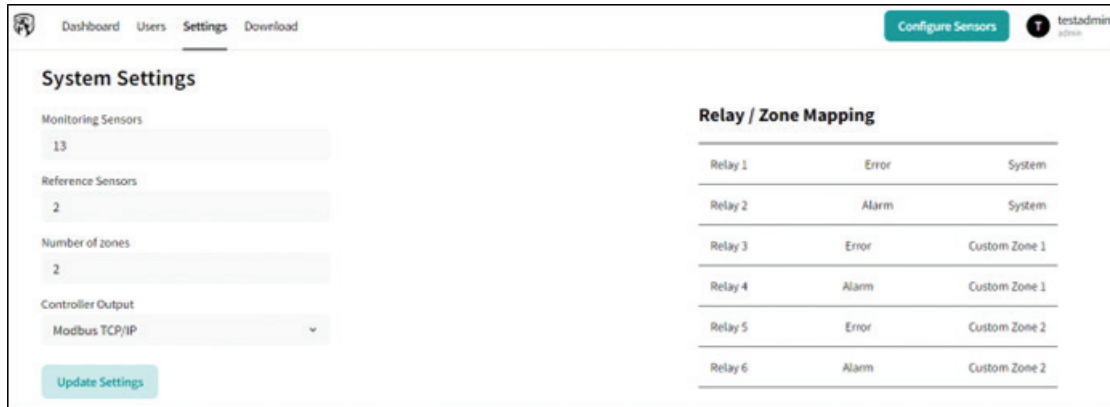

The screenshot displays the 'Settings' tab of the xtralis software interface. On the left, under 'System Settings', there are input fields for 'Monitoring Sensors' (13), 'Reference Sensors' (2), and 'Number of zones' (2). Below these is a 'Controller Output' dropdown menu set to 'Modbus TCP/IP'. An 'Update Settings' button is at the bottom left. On the right, the 'Relay / Zone Mapping' table is shown:

Relay	Event	Zone
Relay 1	Error	System
Relay 2	Alarm	System
Relay 3	Error	Custom Zone 1
Relay 4	Alarm	Custom Zone 1
Relay 5	Error	Custom Zone 2
Relay 6	Alarm	Custom Zone 2

KEY APPLICATIONS

Industry Type	Key Applications
Stationary Battery Energy Storage	Containerized / modular systems Built environment systems
Data Centers	Battery UPS
Manufacturing	Assembly lines Battery formation process Cell aging and EOL testing Module or pack assembly
Automotive	Car parks / garages Charging bays Vehicle test facilities
Laboratory Safety	Environmental chambers Battery abuse testing
Shipping and Storage	Post-manufacturing storage Battery-powered equipment

SPECIFICATIONS

Controller Specifications	
Dimensions (LxWxH)	115mm x 82mm x 34mm
Input Power Range	12 VDC
Max Sensors Per Controller	100
Power Consumption Specifications	
Controller	36 W (@ 12 VDC)
Hub (Fully Populated)	6.0 W (@ 12 VDC)
Additional Hardware	See User Manual (Doc. 37141) for details.
MODBUS Output Specifications	
Hardware	TCP/IP Ethernet
Relay Output Specifications	
Connector Type	Screw Terminals
Signal Type	16 SPDT Form C Relays See User Manual (Doc. 37141) for details.
Product Life Specifications	
Target lifetime	> 10 years

Gas Detection Specifications	
Target Gases	Lithium-ion battery electrolyte solvent vapours
Min. Detection Threshold	< 1ppm/sec
Response Time	5 seconds
Fault Detection	Single cell failure
Temperature Measurement Specifications	
Measurement Range	-40 to 125°C (-40 to 257°F)
Measurement Accuracy	± 0.4°C from 5 to 60°C (41 to 140°F)
Humidity Measurement Specifications	
Measurement Range	0 to 100% RH (non-condensing)
Measurement Accuracy	± 2.0% RH from 20 to 80% RH
Environmental Specifications	
Operating Temperature	Controllers: 0 to 40°C (32 to 104°F) Sensors and Hubs: -10 to 50°C (14 to 122°F)
Humidity	10 to 90% RH (non-condensing)

ABOUT XTRALIS



Xtralis is a leading global provider of powerful solutions for very early & reliable detection of smoke, fire, and gas threats. Our technologies prevent disasters by giving users time to respond before life, critical infrastructure or business continuity is compromised.

We protect highly valuable and irreplaceable assets and infrastructure belonging to the world's top governments and businesses.

To learn more, please visit us at www.xtralis.com

PRODUCTS:

Gaseous Suppression



Inert Gas (IG-01, IG-55, IG-100, IG-541)
Novec 1230™ Fluid (FK-5-1-12)
FM-200® (HFC-227ea.)
Carbon Dioxide (CO₂)
Hybrid Systems (N₂ / Water)
Pressure Relief Vents
Enclosure Integrity Testing Equipment
Pipe & Fittings

Water Suppression



Water Mist - High Pressure
Water Mist - Intermediate Pressure
Water Mist - Low Pressure
Hybrid Systems (Water / N₂)
Monitors & Delivery Systems
High Speed Deluge

Foam Suppression



Foam Concentrates
Foam Proportioning
Foam Delivery Systems
Compressed Air Foam
Foam Concentrate Testing

Explosion Protection



Explosion Suppression
Explosion Isolation
Explosion Vents & Pressure Relief
Spark Suppression
Explosibility Testing

Fire Detection



Linear Heat Detection - Digital
Linear Heat Detection - Fibre Optic
Linear Heat Detection - Micro Chip
Flame Detection
Video Imaging Detection
Spark Detection
Control & Indicating Equipment
Thermal Imaging Detection
Aspirating Smoke Detection

Military & Defence



Military Vehicles
Naval Vessels

Special Applications



Micro Environment
Oxygen Reduction
Kitchen Protection Systems
Dry Chemical
Vehicle Systems
Marine & Offshore
Vapour Mitigation
Li-Ion Fire Systems

Support Services



Design / Engineering
Technical Support
Services & Testing

Australia

Head Office

Unit 1, 251 Ferntree Gully Road
Mt Waverley VIC 3149
Australia

Brisbane Office

Unit 7, 93 Rivergate Place
Murarrie QLD 4172
Australia

Perth Office

18 – 20 Ledgar Road
Balcatta WA 6021
Australia

Sydney Office

Unit 5, 11 Reliance drive Tuggerah
NSW 2259
Australia

1300 742 296

www.fire-protection.com.au
enquiries@fire-protection.com.au

New Zealand

Auckland Office

Unit 2, 13 Airborne Road
Albany North Shore 0632
New Zealand

0011 64 9415 5488

www.fire-protection.net.nz



‘Every solution for your special hazard problems’